

EP's Smart Intralogistics Solution



XP15 B/B+

Pallet mover **LI-ION**
TECHNOLOGY
across factory and warehouse 1.5T

- Your best co-worker
- Stand alone installation
- Flexible to change application
- Plug-in battery design
- 2D visual navigation
- Maximum personal safety protection


EP EQUIPMENT CO.,LTD
www.ep-ep.com



FEATURE


■ XP15 B: A-B-C-...-A Loop with manual loading and unloading

XP15 B transports pallets along the loop continuously and workers are allowed to load or unload goods manually on the way. Pause on pre-programmed work stations.

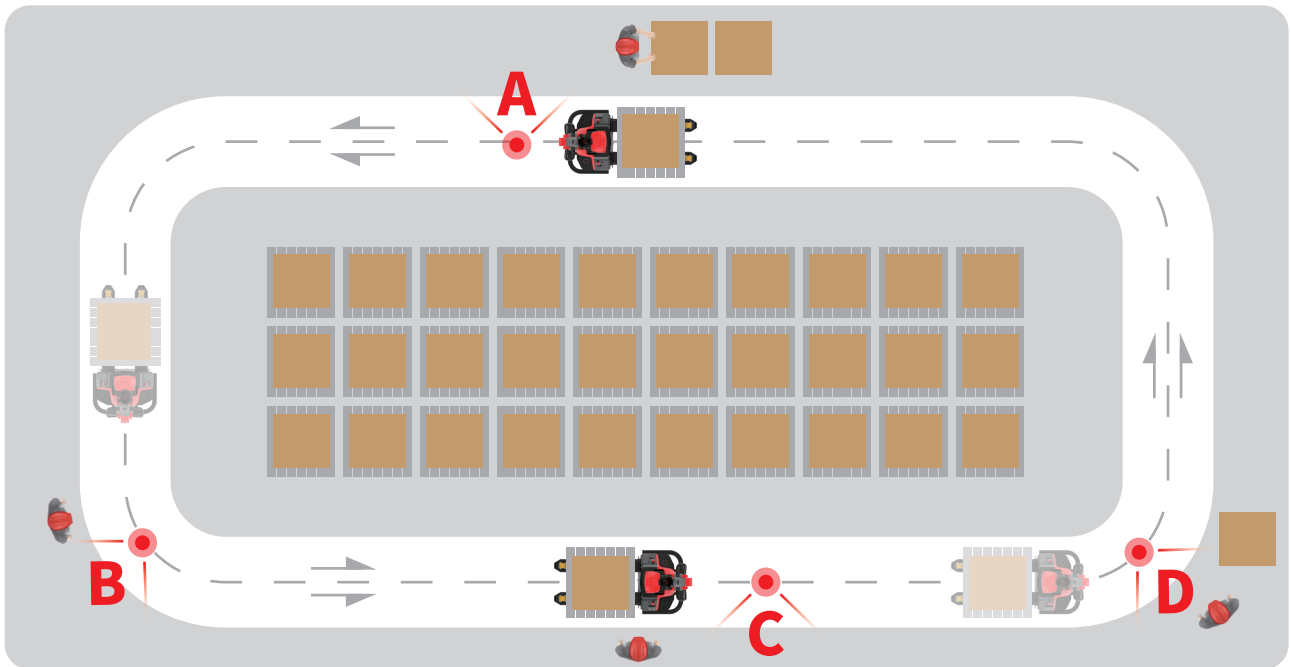

■ XP15 B+: A-B-A with automatic unloading

XP15-B+ starts with manual loading and unloads pallets automatically in the storage area or production. It requires minimum involvement of worker and delivers high process efficiency where transportation tasks need to be repeated permanently.

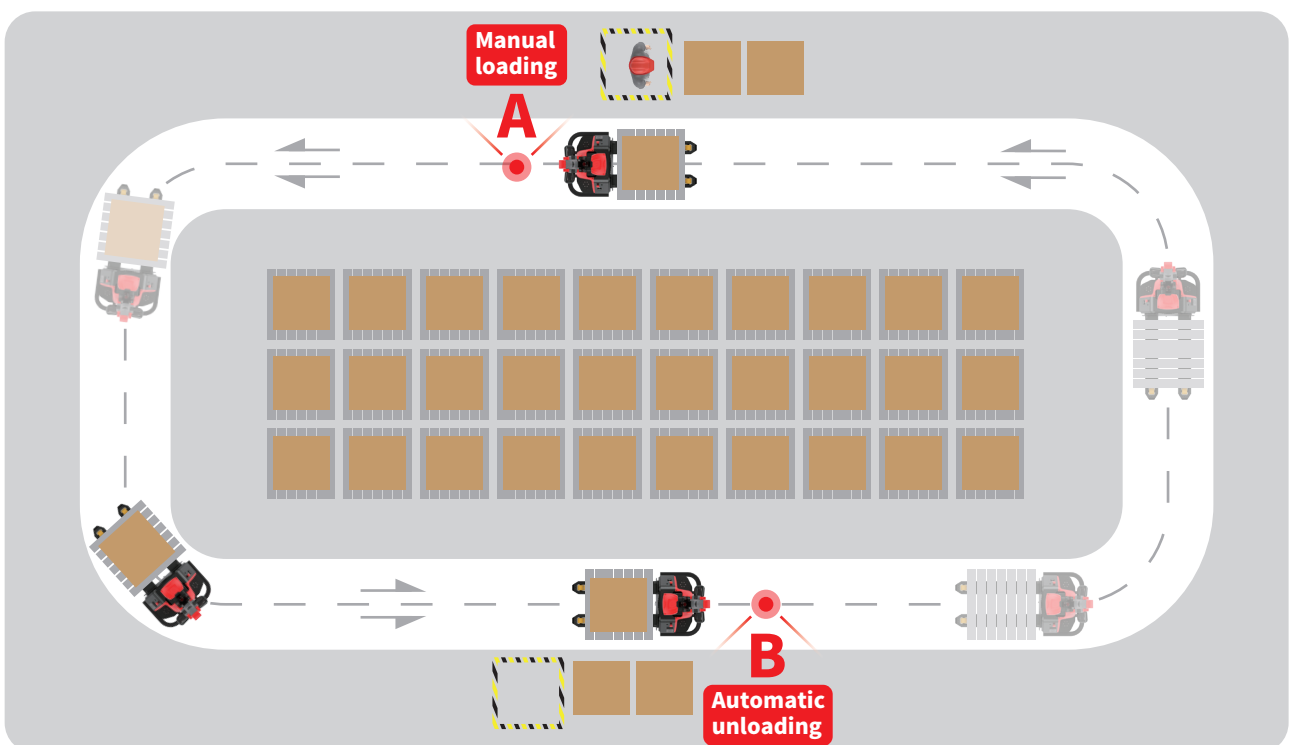

FEATURE


Your best co-worker

You can operate the XP15 as an autonomous mobile robot and an electric pallet truck. Switch between manual and automatic operation by the push of a button.




Stand alone installation

The XP15 is easy to set up for various applications without IT knowledge or specialized hardware and software.

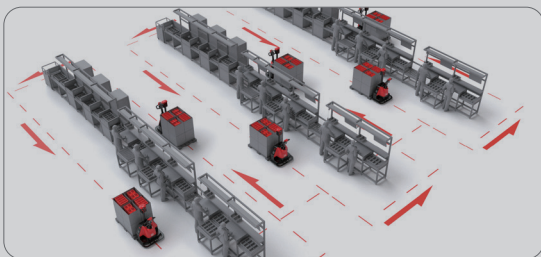

Flexible to change application

The XP15 offers route settings and transportation task monitoring via bluetooth and you can add new routes and stations quickly on your phone.

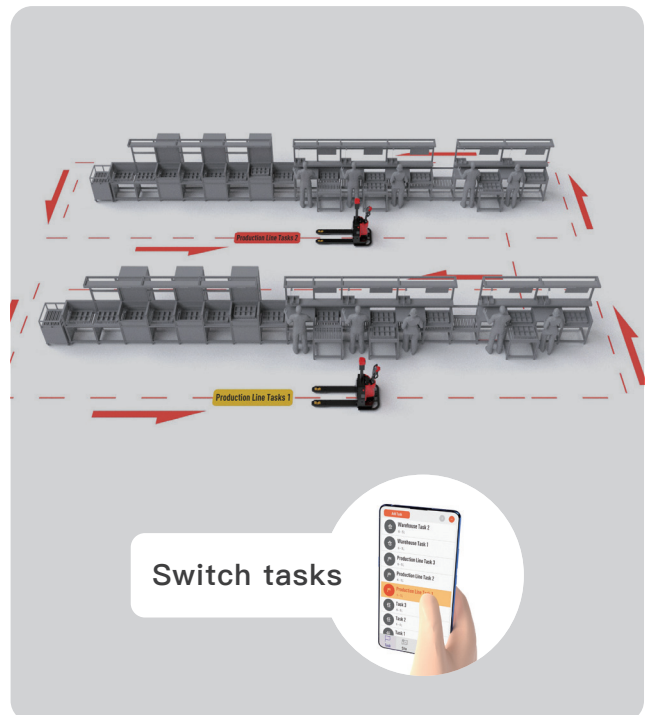

FEATURE


■ Plug-in battery design

The XP15 features plug-in battery design and adopts EP's standard battery box with 24V/60Ah Li-ion battery. This maximizes uptime and provides high availability and flexibility.



■ 2D visual navigation

EP's in-house developed visual navigation technology provides XP15 with highly stable and adaptable navigation. Absolute positioning, with random labeling and visual navigation, the vehicle knows its position at all times to proceed its path.

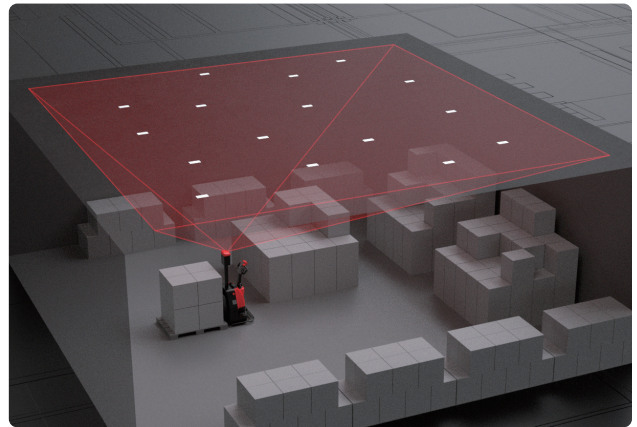

■ Maximum personal safety protection

The XP-15 is equipped with Bumper strips and Lidar detectors that prevent the truck from collision.



Pallet mover across factory and warehouse 1.5T

XP15 B/B+

Distinguishing mark	1.1	Manufacturer			EP
	1.2	Model designation			XP15
	1.3	Drive			Electric
	1.4	Operator type			Pedestrian
	1.5	Load capacity	Q	kg	1500
	1.6	Load center distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	980
	1.9	Wheelbase	y	mm	1210
Service weight	2.1	Service weight		kg	335
	2.2	Axle loading, laden front/rear		kg	1150/510
	2.3	Axle loading, unladen front/rear		kg	120/40
Tyres/chassis	3.1	Tyre type			PU
	3.2.1	Tyre size, front		mm	φ210*94
	3.3.1	Tyre size, rear		mm	85*70
	3.4	Additional wheels (castor wheels)		mm	74*30
	3.5	Wheels, number front/rear (x=drive wheels)		mm	1,2/4
	3.6.1	Tread width, front	b10	mm	504
	3.7.1	Tread width, rear	b11	mm	430
Dimensions	4.4	Lift height	h3	mm	95
	4.9	Height of tiller handle in drive position min./max.	h14	mm	/
	4.15	Lowered height	h13	mm	90
	4.19	Overall length	l1	mm	1695
	4.20	Length to face of forks	l2	mm	545
	4.21	Overall width	b1/b2	mm	842
	4.22	Fork dimensions	s/e/l	mm	55X170X1150
	4.25	Distance across fork -arms	b5	mm	540
	4.32	Ground clearance, center of wheelbase	m2	mm	30
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	2300
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	2160
Performance data	4.35	Turning radius	Wa	mm	1500
	5.1	Travel speed, laden/unladen		km/h	4.5/5
	5.2	Lifting speed, laden/unladen		m/s	0.017/0.02
	5.3	Lowering speed, laden/unladen		m/s	0.09/0.06
	5.8	Max. gradeability, laden/unladen		%	6/16
Electric-engine	5.10	Service brake			Electromagnetic
	6.1	Drive motor rating S2 60 min		kW	0.9
	6.2	Lift motor rating at S3 15%		kW	0.8
	6.4	Battery voltage/nominal capacity		V/Ah	24/60
	6.5	Battery weight		kg	14
Addition data	8.1	Type of drive control			AC
	10.5	Steering design			Electric
	10.7	Sound pressure level at the driver's ear		dB(A)	<70
	10.11	Indoor/Outdoor			Indoor
	10.12	Safety notification			Horn
	10.13	Safety protection			Physical bumper strip
					Lidar
					Emergency stop button
	10.14	Positioning			2D visual navigation
	10.15	Parking accuracy			±20
	10.16	Navigation accuracy			±20
	10.17	Battery type			Li-ion battery

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

